


TEAM AZARASHI REDSEAL SET UP SHEET VER.1.1

Driver: _____ Date: _____
Track: _____ Events: _____
Condition: _____


FRONT SUSPENSIONS

Shock Position



Shock stay
 LA216B
 LA216-B

Spacer _____ mm
 BumpSteerSpacer _____ mm



Caster Block
 7°
 10°

Axle-Height Spacer
 UP Down

Spacer _____ mm
 Shock stay hight _____ mm


Diameter of A.R.B : _____ mm

Bellcrank Spacer: _____ mm

Camber angle : _____


Toe angle : _____

Ride Height : _____ mm

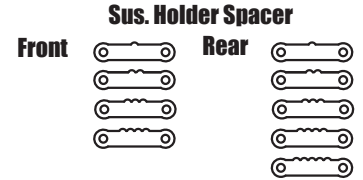


REAR SUSPENSIONS

Shock Position




Shock stay
 LA217
 LA217H

Spacer _____ mm



Wheel Spacer _____ mm



Rear Sus.Arm
 LA272(UM566.UM521)
 UM521
 LA255
 UM713(RB6)


Diameter of A.R.B : _____ mm

Camber angle : _____

Rear Hub add Toe : _____

Ride Height : _____ mm

Wing Height




Spacer _____ mm
 Shock stay hight _____ mm

Hub Spacer
 Fr _____ mm
 Re _____ mm

Sus. Holder RF
 Standard
 LAW36
 IN OUT

Sus. Holder RR
 Standard
 LAW37
 IN OUT

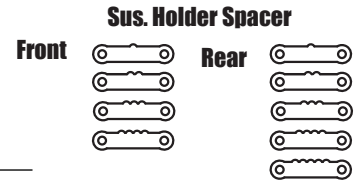

FRONT SHOCKS

Spring: _____ Piston: _____
 Shock oil: _____ Limiter: _____

REAR SHOCKS

Spring: _____ Piston: _____
 Shock oil: _____ Limiter: _____

DIFFERENTIALS

Front Diff setting: _____
 Rear Diff setting: _____

AERO DEVICE

Body : _____ Rear Wing: _____
 Wing Angle : _____ Front Wing: _____

FRONT TIRES

Tire / Compound: _____
 Insert: _____ Wheel: _____

REAR TIRES

Tire / Compound: _____
 Insert: _____ Wheel: _____

ELECTRONICS

Motor: _____ ESC: _____
 Pinion / Spur : T / T Servo: _____

Radio: _____ Receiver: _____
 ESC Setting: _____

TRACK INFO

Traction: High / Midium / Low Somooth / Bumpy SoftDirt / Grass / Clay / Astroturf Dry / Wet Dusty / Clean