


TEAM AZARASHI REDSEAL

SET UP SHEET Ver.1.1


Driver: _____ Date: _____
 Track: YATABE ARENA Events: _____
 Condition: _____

FRONT SUSPENSIONS

Shock Position




Shock stay
 LA216B
 LA216-B



Spacer 1 mm
 Shock stay height 0 mm

Spacer 0 mm BumpSteerSpacer 0 mm



Caster Block
 7°
 10°

Axle-Height Spacer
 UP Down

Diameter of A.R.B: _____ mm


Bellcrank Spacer: 1 mm

Camber angle: -1.0

Toe angle: 0


Ride Height: 22 mm

Sus. Holder Spacer

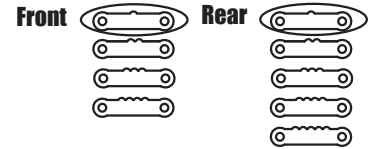


REAR SUSPENSIONS

Shock Position




Shock stay
 LA217
 LA217H

Wing Height



Spacer 1 mm
 Shock stay height 0 mm

Spacer 2 mm



Wheel Spacer 0 mm

Rear Sus.Arm
 LA272(UM566.UM521)
 UM521
 LA255
 UM713(RB6)

Sus. Holder RF
 Standard
 LAW36
 IN OUT

Sus. Holder RR
 Standard
 LAW37
 IN OUT


Diameter of A.R.B: 1.2 mm

Camber angle: -1.0

Rear Hub add Toe:

Ride Height: 22 mm

Sus. Holder Spacer

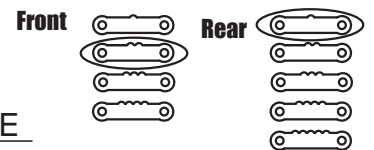

FRONT SHOCKS

Spring: Kyosho Gold Piston: 5hole
 Shock oil: Losi 35 Limiter: 0

REAR SHOCKS

Spring: Kyosho Gold Piston: 5hole
 Shock oil: Losi 35 Limiter: 0

DIFFERENTIALS

Front Diff setting: _____
 Rear Diff setting: _____

AERO DEVICE

Body: REDSEAL Rear Wing: AZ-0034 N.Splend
 Wing Angle: 0 Front Wing: _____

FRONT TIRES

Tire / Compound: Panther T725C
 Insert: P/L Closed Wheel: W5201W

REAR TIRES

Tire / Compound: Panther T755C
 Insert: P/L Closed Wheel: W5028W

ELECTRONICS

Motor: SP V3.0 7.5T ESC: Tresray
 Pinion / Spur: T / T Servo: _____

Radio: _____ Receiver: _____
 ESC Setting: _____

TRACK INFO

Traction: Hight / ~~Medium~~ / Low ~~Somooth~~ / Bumpy SoftDirt / Grass / ~~Clay~~ / AstroTurf ~~Dry~~ / Wet Dusty / ~~Clean~~